


HLS SERIES

Hazardous Location Edge Lit LED Sign Light


- Class I, Division 2, Groups A, B, C & D
- Class II, Division 2, Groups F & G
- Class III
- UL1598A Marine Outside Type
- Temperature Class (T-Rating)-T6
- Patent No. 7,287,347
- IP65
- ETL Listed

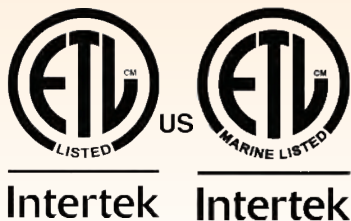

AZZ | R-A-L™
RIG-A-LITE

HLS SERIES

Hazardous Location Edge Lit LED Multipurpose Sign Light

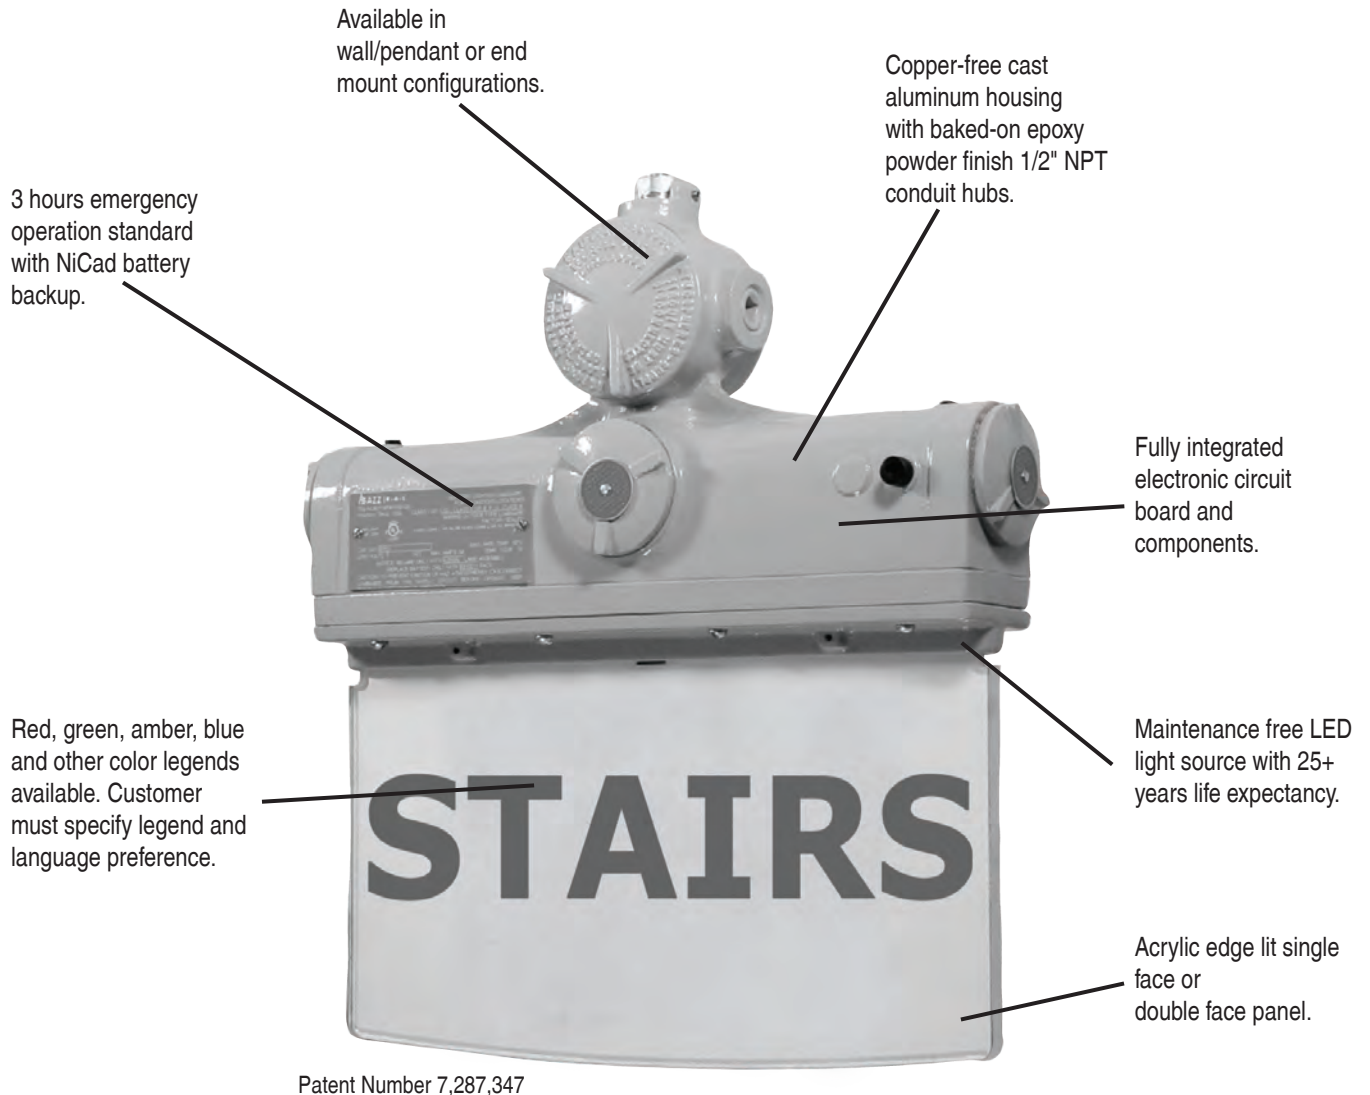


HLS series fixture uses a maintenance free LED light source with a 25 year life expectancy. Emergency fixtures meet or exceed Energy Star and OSHA requirements. These fixtures are also suitable for installation in wet or damp locations where salt water spray is possible.

LED
HLS Series

Hazardous Locations • Class I, Division 2 • UL 844 • UL 1598A • UL 8750 • Wet Locations • IP65

Catalog Number Logic

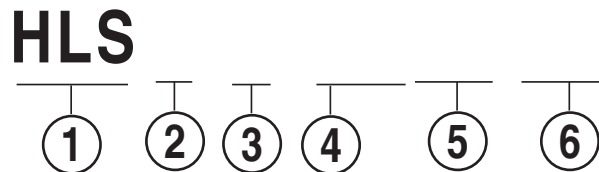

- 1 BASIC SERIES**
Hazardous Location LED Sign Light*
*Customer must specify sign color and legend
Class I, Division 2 Groups A, B, C & D
Class II, Division 2, Groups F & G
Class III
UL 1598A Marine Outside Type
IP65
ETL Listed
Temperature Class (T-Rating)-T6

NUMBER OF FACES

- 2**
1 = Single Face
2 = Double Face

- 3 LEGEND COLOR**
A = Amber
B = Blue
R = Red
G = Green
X = Other (Contact Factory)

- 4 VOLTAGE/FREQUENCY**
DT = 120/277V 60 HZ
24 = 220-240V 50/60 HZ
Other voltages available- consult factory

- 5 MOUNTING**
WP= Wall/Pendant Mounting
EB = End Bracket

- 6 OPTIONS¹**
EM = Emergency Battery Backup
X = Specify Legend (Cannot Say EXIT)
¹Consult factory for pricing.

Maximum Input Power

Red no battery- 1.5 Watts
Red with battery- 2.5 Watts
Green no battery- 2.3 Watts
Green with battery- 3.0 Watts

Operating Temperature Range


Temperature Rating- T6
Red Legend
+10° C Minimum to +55° C Maximum
Green Legend
+10° C Minimum to +40° C Maximum

Catalog logic is for explaining catalog number structure only. Not all combinations are possible; consult factory for catalog numbers not listed in charts.

LED
HLS Series

Hazardous Locations • Class I, Division 2 • UL 844 • UL 1598A • UL 8750 • Wet Locations • IP65

HLS Series Fixture Dimensions (inches)

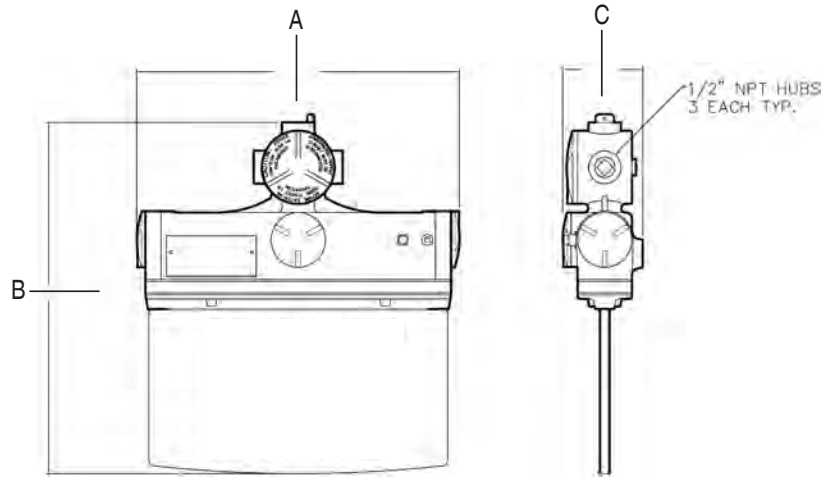

HLS SERIES	Dimensions (inches)			Boxed Weight	Shipping Volume (Boxed Fixtures)
	A	B	C		
HLS LED Sign Light	14.88	16.00	3.69	14 lbs.	1.24 cu. ft.