

INSTALLATION DATA SHEET

SSFN SERIES



WARNING!

1. TO PREVENT RISK OF ELECTRICAL SHOCK DEACTIVATE/DISCONNECT POWER SUPPLY BEFORE INSTALLING MAINTAINING OR RELAMPING FIXTURE.
2. TO REDUCE RISK OF FIRE OR EXPLOSION, DO NOT INSTALL WHERE THE MARKED OPERATING TEMPERATURE EXCEEDS THE IGNITION TEMPERATURE OF THE HAZARDOUS ATMOSPHERE(S).
3. THIS FIXTURE SHOULD BE INSTALLED BY QUALIFIED TECHNICIANS IN STRICT ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ANY LOCAL REQUIREMENTS.



INSTALLATION:

FIXTURE MOUNTING:

1. Fixture should be installed per USCG-46CFR, Subchapter J, parts 100-113 for all marine applications.
2. Some of the typical installations are shown on the back of this Instruction sheet.
3. This floodlight is equipped with 3/4" NPT hub at the bottom for incoming power cable and CordGrip (not provided).

FIXTURE WIRING:

1. Verify voltage, wattage, lamp type from the fixture label affixed on the reflector.
2. Open the fixture lens frame by loosening lens frame retaining screws and allow lens frame to swing out.
3. Wiring diagrams shown on the right are for reference only, refer to the wiring diagram affixed on the ballast. Connect green ground wire from the fixture to the ground wire in cable. Connect proper fixture voltage lead to the incoming black wire in cable. Connect neutral wire from the fixture to the white wire in cable.
4. Securely tighten the Cord grip to the fixture hub.
5. Close lens frame and tighten screws to insure positive gasket seal.

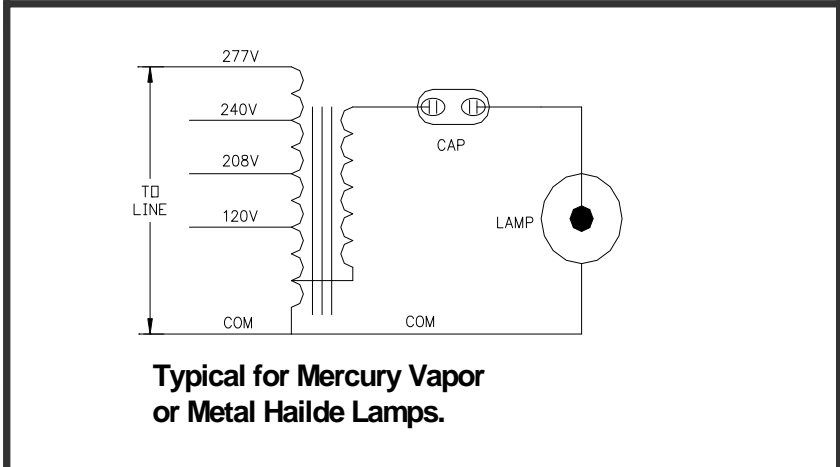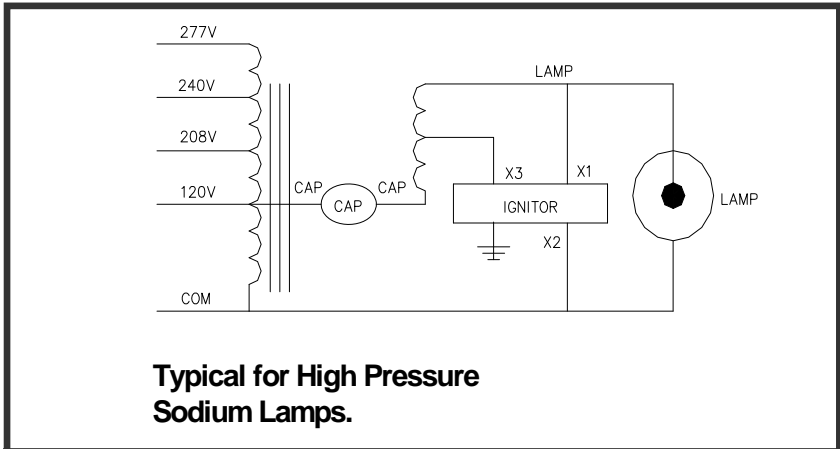

INSTALLATION DATA SHEET SSFN SERIES



MAINTENANCE

When servicing, a mild soap, or non-abrasive commercial cleaner may be used to clean lens and reflectors. Do not use acid or caustic solutions.

SSFN Series Typical Installations

